

Typical Application Circuit

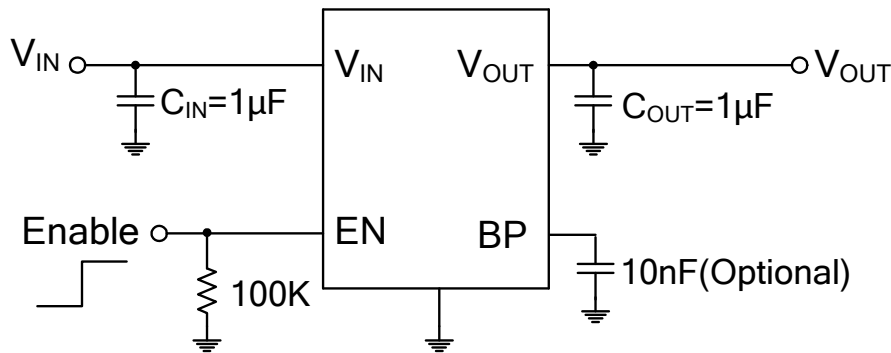


Figure 1. Fixed Voltage BP Version

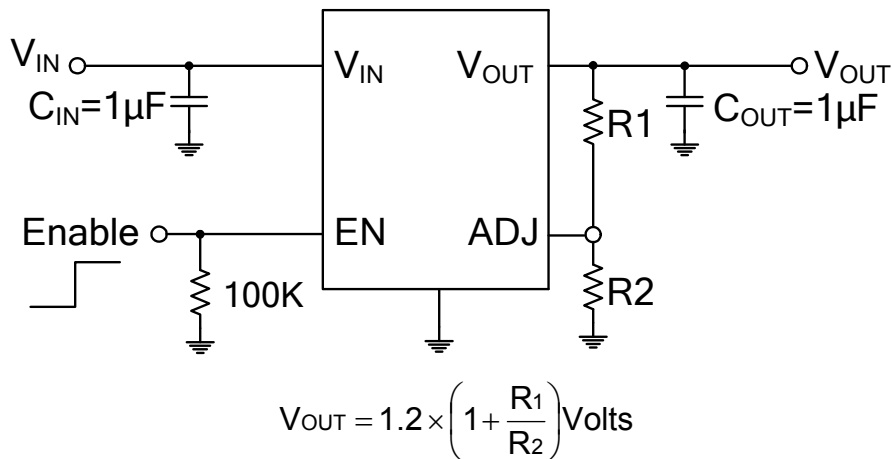


Figure 2. Adjustable Voltage Version

Absolute Maximum Ratings (Note1)

| | |
|---|----------------|
| Supply Voltage V_{IN} | 8V |
| Power Dissipation, P_D @ $T_A=25^\circ\text{C}$ | |
| SC-70-5 | 300mW |
| SOT-23-5 / TSOT-23-5 | 400mW |
| Thermal Resistance, θ_{ja} | |
| SC-70-5 | 333°C/W |
| SOT-23-5 / TSOT-23-5 | 250°C/W |
| Lead Temperature | 260 °C |
| Storage Temperature | -65°C to 150°C |
| ESD Susceptibility | |
| HBM (Human Body Mode) | 2kV |
| MM (Machine Mode) | 200V |

Recommended Operating Conditions

| | |
|-------------------------------|----------------|
| Input Voltage V_{IN} | 2.5V to 7V |
| EN Input Voltage | 0V to 7V |
| Junction Temperature | -40°C to 125°C |
| Ambient Operating Temperature | -40°C to 85°C |

Electrical Characteristics (Unless otherwise specified $V_{IN}=V_{OUT}+1V$, $T_A=25^\circ C$)

| Parameters | Symbol | Condition | Min | Typ | Max | Units | |
|--|-------------------|--|------------------------------------|------|-------|---------------|----|
| Operating Voltage Range (Note 2) | V_{IN} | | | | 7 | V | |
| Standby Current | I_{SBY} | $V_{EN} = GND, Shutdown$ | | 0.01 | 1 | μA | |
| Supply Current Limit | I_{LIMIT} | $R_{LOAD} = 1\Omega$ | 360 | 450 | | mA | |
| Quiescent Current | I_Q | $V_{OUT} = 2.8V$ | | 85 | | μA | |
| Dropout Voltage (Note 3) | V_{DROP} | $I_{OUT} = 300mA$ | $V_{OUT} = 1.5V$ | 1150 | 1300 | mV | |
| | | | $V_{OUT} = 1.8V$ | 800 | 1000 | mV | |
| | | | $V_{OUT} = 2.5V$ | 320 | 500 | mV | |
| | | | $V_{OUT} = 2.7V$ | 240 | 360 | mV | |
| | | | $V_{OUT} = 2.8V$ | 200 | 300 | mV | |
| | | | $V_{OUT} = 3.0V$ | 180 | 260 | mV | |
| | | | $V_{OUT} = 3.1V$ | 160 | 230 | mV | |
| | | $V_{OUT} = 3.3V$ | 150 | 200 | mV | | |
| EN input Bias Current | I_{IBSD} | $V_{EN} = GND$ or V_{IN} | | 0 | 100 | nA | |
| Line Regulation | ΔV_{LINE} | $V_{IN} = (V_{OUT} + 1V)$ to 5.5V $I_{OUT} = 1mA$ | | | 10 | mV/V | |
| Load Regulation | ΔV_{LOAD} | $1mA < I_{OUT} < 300mA$ | | 15 | 25 | mV | |
| Output Noise Voltage | eNO | 10Hz to 100kHz $I_{OUT} = 200mA$ $C_{OUT} = 1\mu F$ | | 100 | | μV_{RMS} | |
| Thermal Shutdown Temperature | T_{SD} | | | 165 | | $^\circ C$ | |
| Thermal Shutdown Temperature Hysteresis | ΔT_{SD} | | | 30 | | $^\circ C$ | |
| Output Voltage Accuracy | ΔV_{OUT} | $I_{OUT} = 1mA$ | -2 | | +2 | % | |
| Fast Discharge N-MOSFET Turn On Resistance | $R_{DISCHARGE}$ | $V_{IN} = 4V, V_{EN} = 0V$ | | 35 | | Ω | |
| Reference Voltage Tolerance | V_{REF} | | 1.176 | 1.2 | 1.224 | V | |
| Adjust Pin Current | I_{ADJ} | | | 0.1 | | nA | |
| Adjust Pin Threshold | $V_{TH(ADJ)}$ | | | 0.1 | | V | |
| EN Threshold | Logic-Low V | V_{IL} | $V_{IN} = 3V$ to 5.5V, Shutdown | | | 0.4 | V |
| | Logic-High V | V_{IH} | $V_{IN} = 3V$ to 5.5V, Start-up | 1.2 | | | V |
| Power Supply Rejection Rate | f = 100Hz | PSRR | $C_{OUT} = 1\mu F, I_{OUT} = 10mA$ | | -70 | | dB |
| | f = 10KHz | | | | -65 | | |


Note 1: Stresses listed as the above "Absolute Maximum Ratings" may cause permanent damage to the device. These are for stress ratings. Functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may remain possibility to affect device reliability.

Note 2: $V_{IN(MIN)} = V_{OUT} + V_{DROPOUT}$

Note 3: The dropout voltage is defined as $(V_{IN} - V_{OUT})$ when V_{OUT} is 100mV below the target value of V_{OUT} .

Pin Configurations

(Top View)

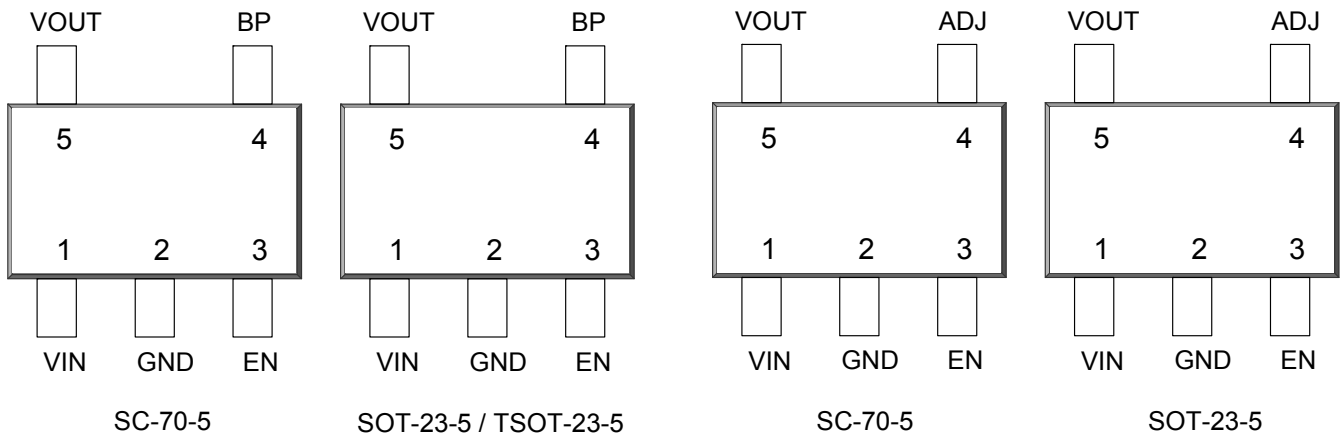

Pin Description

| Pin Name | Pin Function |
|----------|--|
| EN | Chip Enable (Active High). Note that this pin is high impedance. There should be a pull low 100kΩ resistor connected to GND when the control signal is floating. |
| GND | Ground |
| VOUT | Output Voltage |
| VIN | Input Voltage |
| BP | Bypass Pin .Note that this function is not used. This pin should be floating. |
| ADJ | Feedback Input, this pin could not be floating. |

Function Block Diagram

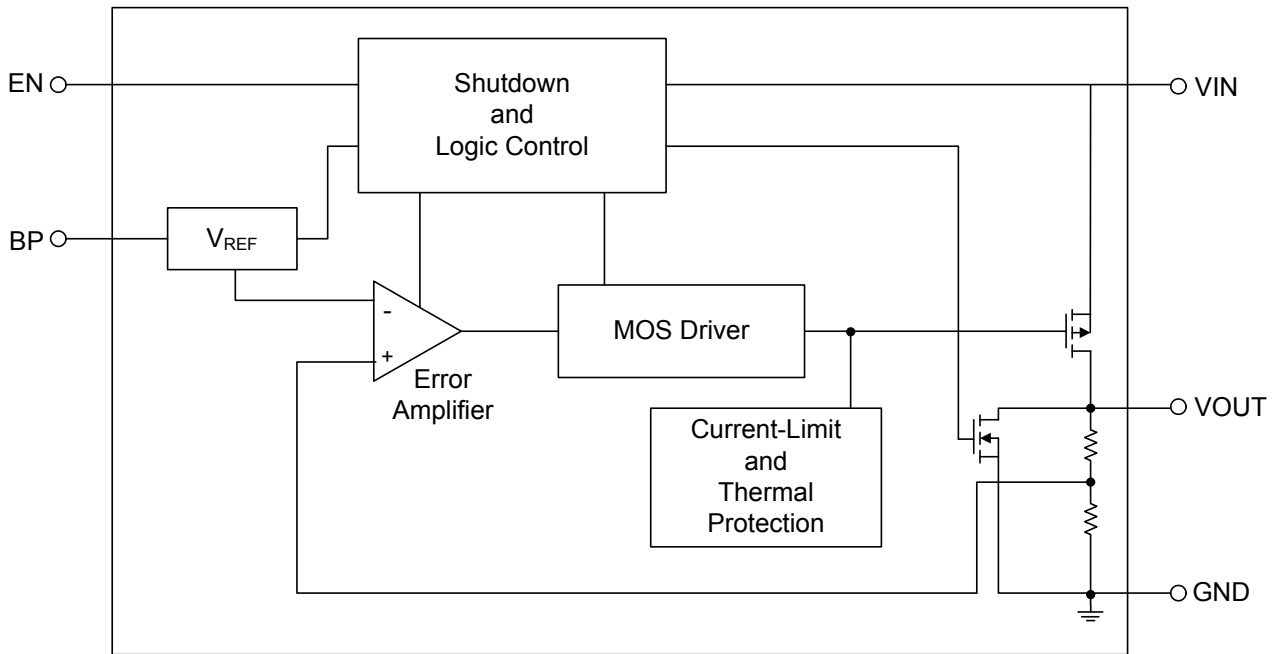


Figure3. BP Version


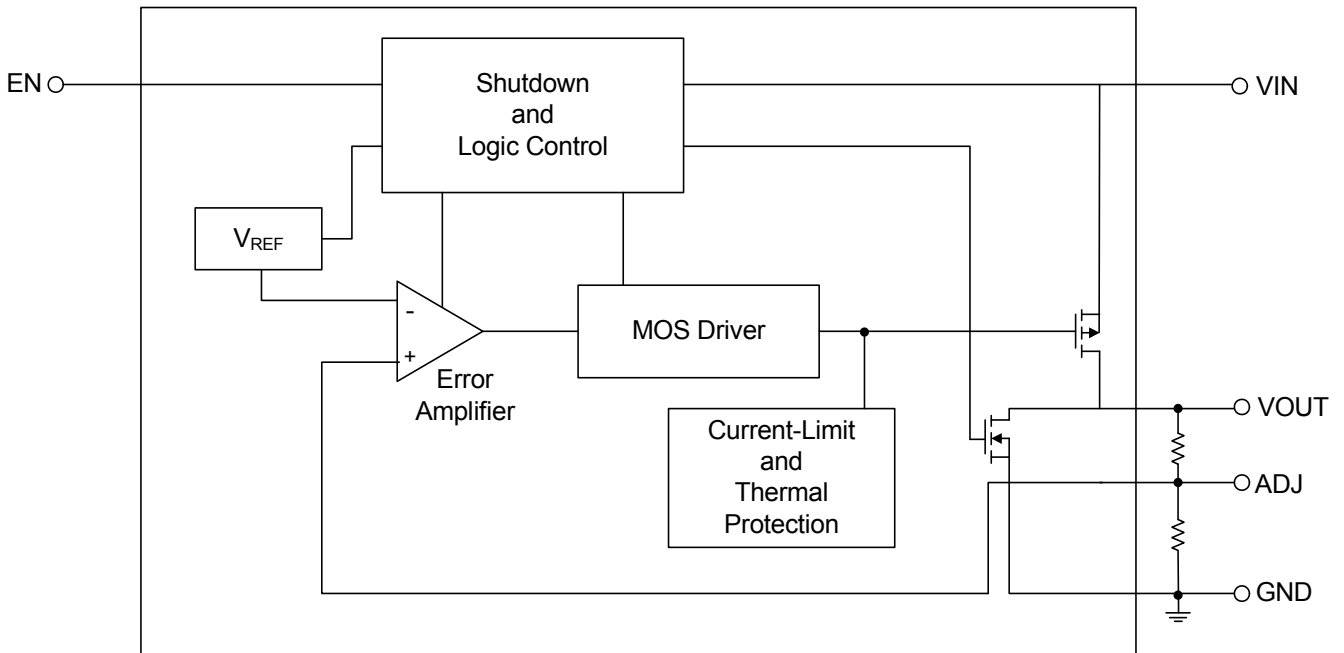


Figure4. ADJ Version


Typical Operating Characteristics

(Unless otherwise specified $V_{IN}=V_{OUT}+1V$, $T_A=25^\circ C$)


Quiescent Current vs. Input Voltage

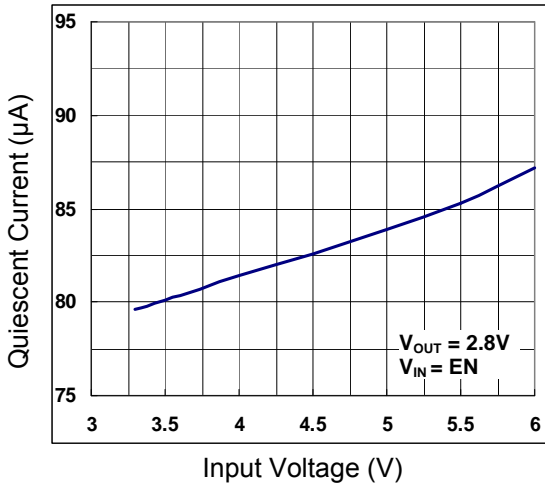


Current Limit vs. Input Voltage

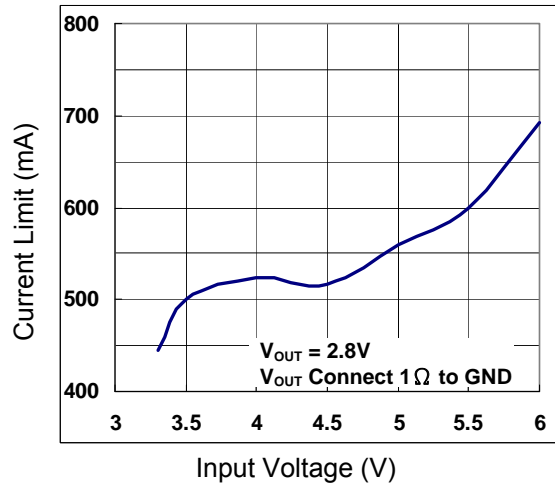


Dropout Voltage vs. Load Current

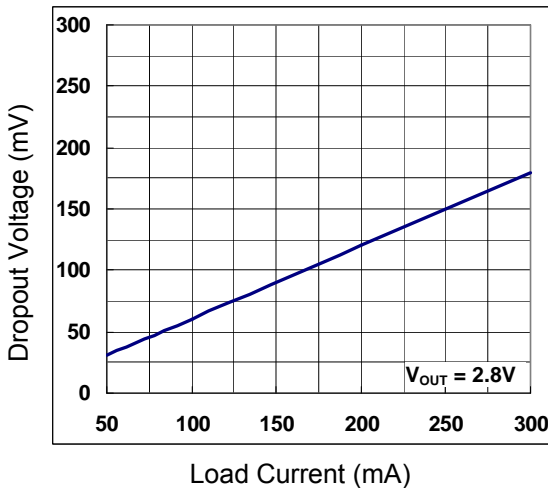


Shutdown Current vs. Input Voltage

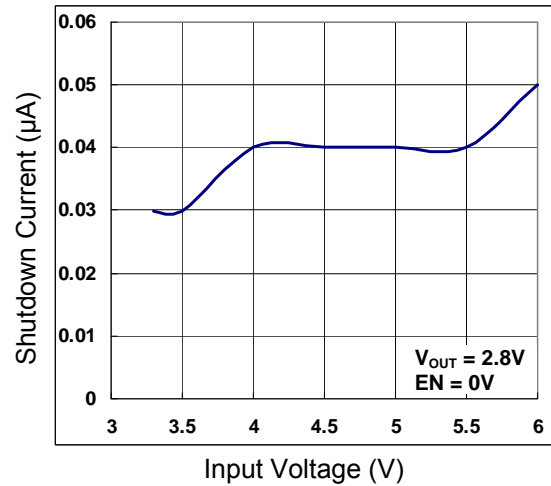


Load Regulation

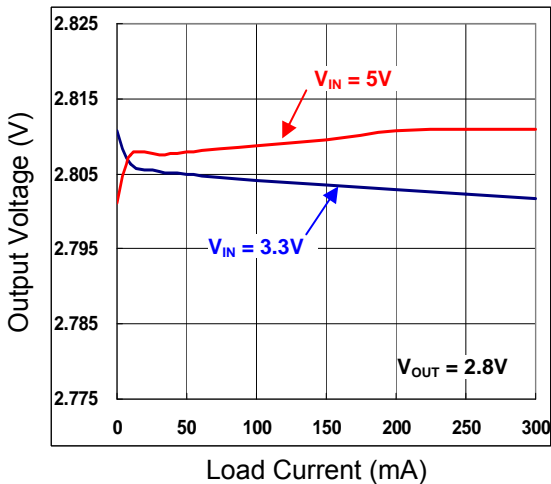


Line Regulation

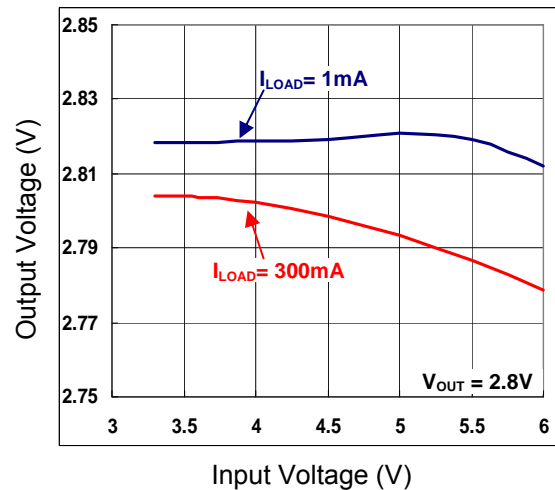


PSRR

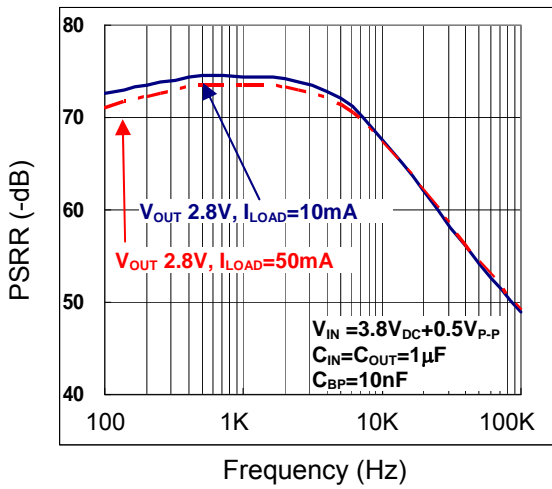


Region of Stable C_{OUT} ESR vs. Load Current

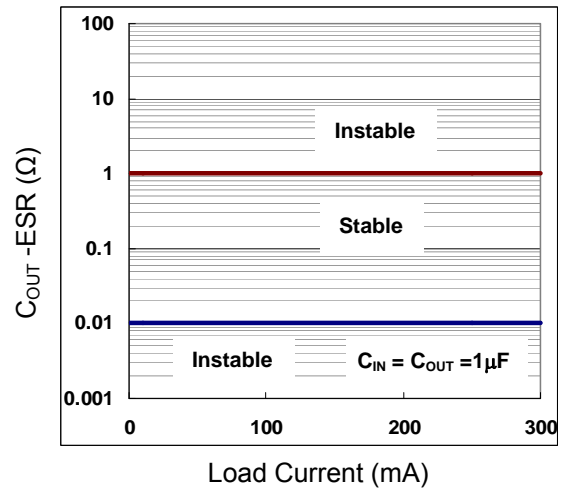


Enable Threshold Voltage vs. Temperature

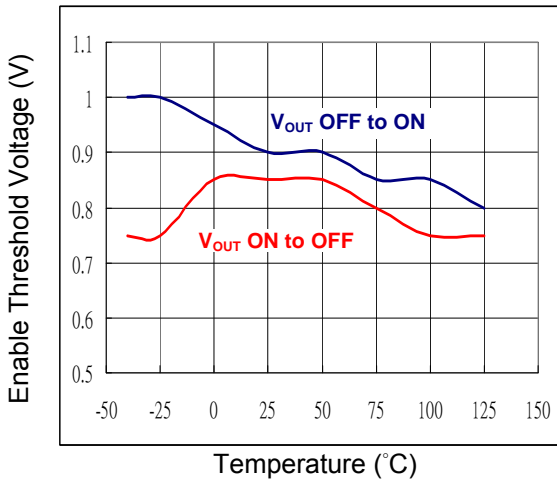


Enable Threshold Voltage vs. Input Voltage

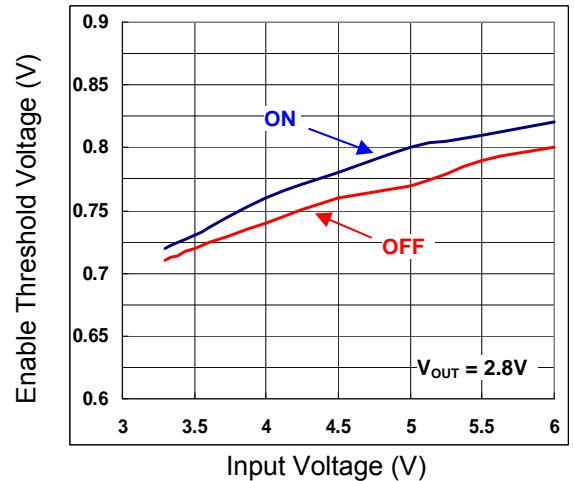


Start-up from EN

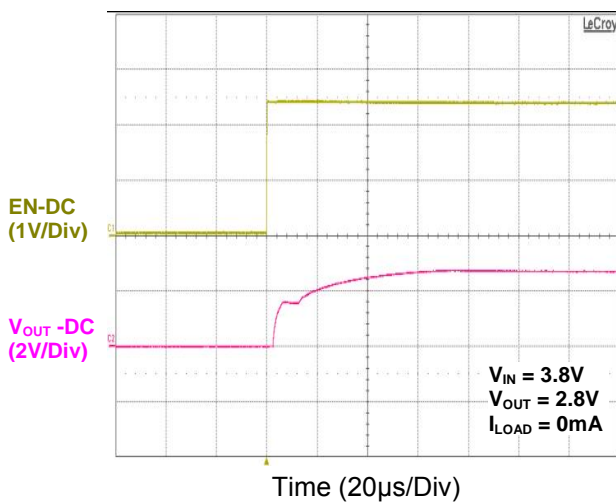


Start-up from EN

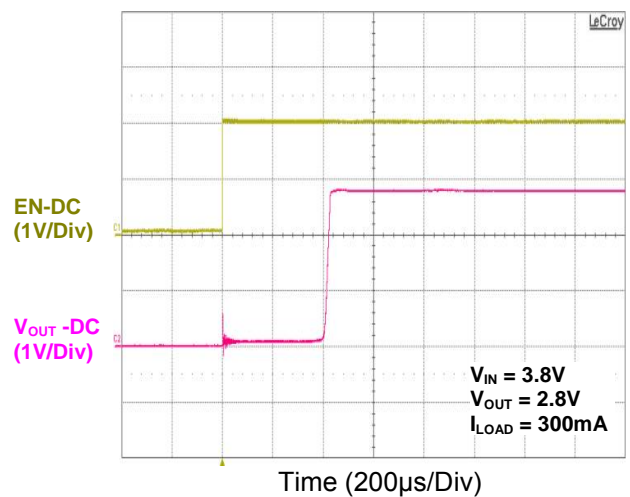


Shutdown from EN

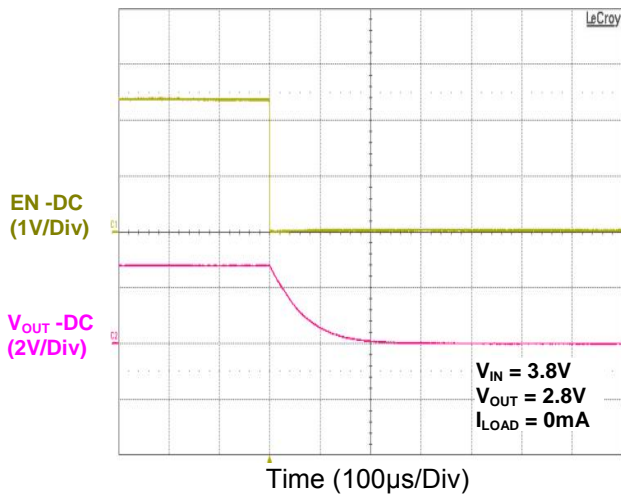


Shutdown from EN

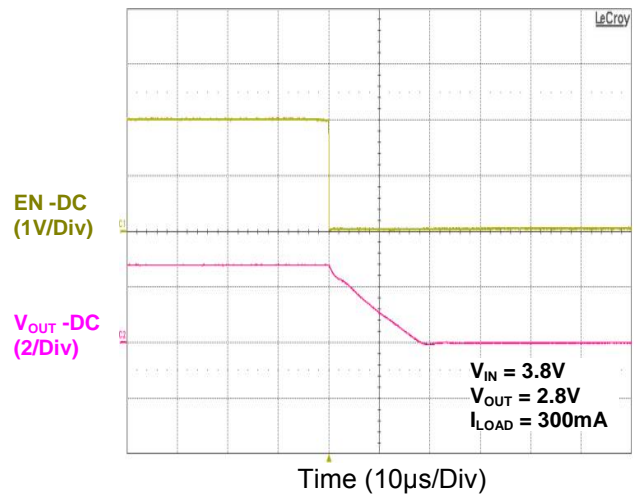


Load Transient Response

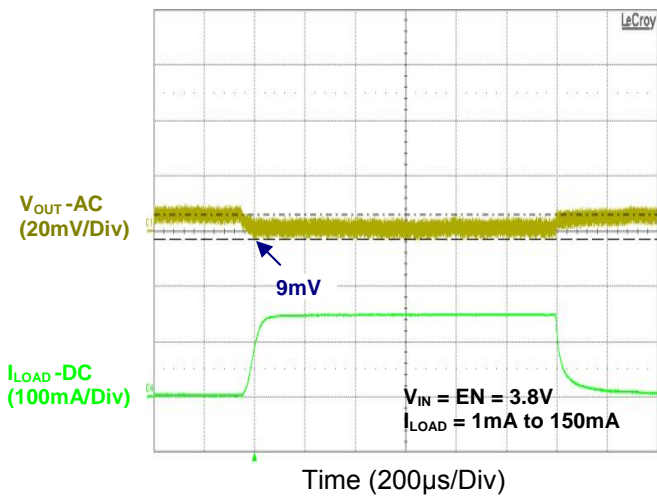


Load Transient Response

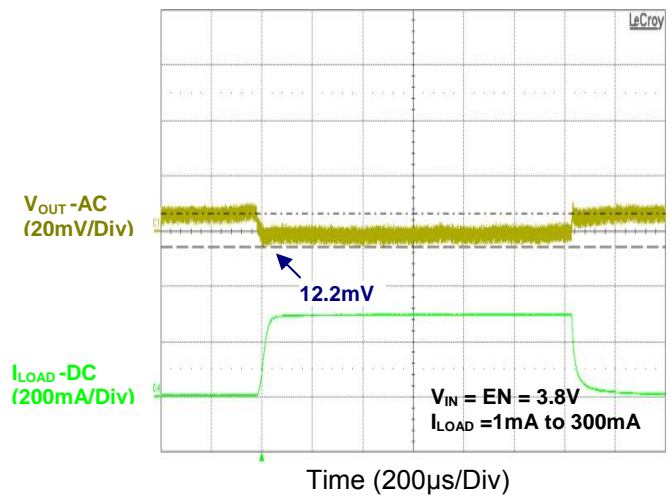

Line Transient Response

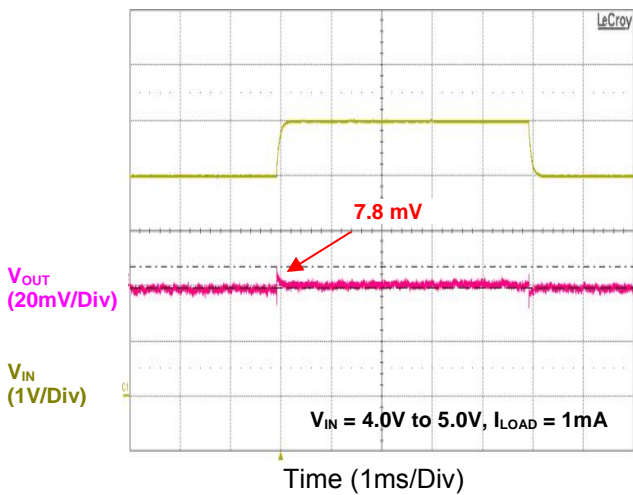

Line Transient Response

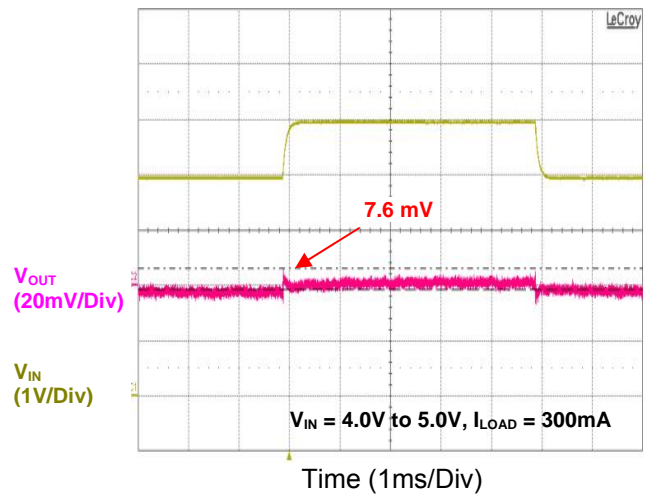

Application Information

Capacitor Selection and Regulator Stability

Input Capacitor

An input capacitance of 1µF is required between the device input pin and ground directly (the amount of the capacitance may be increased without limit). The input capacitor **MUST** be located less than 1 cm from the device to assure input stability (see PCB Layout Section). A lower ESR capacitor allows the use of less capacitance, while higher ESR type (like aluminum electrolytic) requires more capacitance. Capacitor types (aluminum, ceramic and tantalum) can be mixed in parallel, but the total equivalent input capacitance/ESR must be defined as above for stable operation. There are no requirements for the ESR on the input capacitor, but tolerance and temperature coefficient must be considered when selecting the capacitor to ensure the capacitance is 1µF over the entire operating range.

Output Capacitor

The iD9306 is designed specifically to work with very small ceramic output capacitors. The minimum capacitance recommended (temperature characteristics of X7R, X5R, Z5U or Y5V) is within the 1µF to 10µF range with 5mΩ to 50mΩ ESR range ceramic capacitor between LDO output and GND for transient stability, but it may be increased without limit. Higher capacitance values help to improve transient response. The output capacitor's ESR is critical because it forms a zero to provide phase lead which is required for loop stability.


Enable Function

The iD9306 is shut down by pulling the EN pin low, and turned on by driving the input high. If the shutdown feature is not required, the EN pin should be tied to VIN to keep the regulator on at all times (the EN pin **MUST NOT** be left floating).

To assure proper operation, the signal source used to drive the EN pin must be able to swing above and below the specified turn-on/off voltage thresholds listed in the “Electrical Characteristics” under V_{IH} and V_{IL} . The ON/OFF signal may come from either CMOS output, or an open-collector output with pull-up resistor to the device input voltage or another logic supply. The high-level voltage may exceed the device input voltage, but must remain within the absolute maximum ratings for the EN pin.

Adjustable Operation

The adjustable version of the iD9306 has an output voltage ranging from 1.2V to 5V. The output voltage of the iD9306 adjustable regulator is programmed using an external resistor divider as shown in Figure 5. The output voltage can be calculated using:

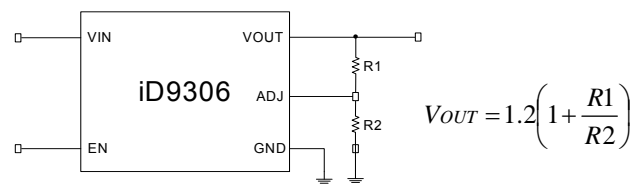

Where:

$V_{REF} = 1.2V$ TYP. (the internal reference voltage)

Fig. 5

To enable default output voltage (pre-set), connect ADJ pin to ground. There is no external component needed to decide voltage.




Table 1: Typical Output Voltage Setting Value

| Vout | R1 | R2 |
|-------|--------|--------|
| 1.5 V | 75 kΩ | 300 kΩ |
| 1.8 V | 150 kΩ | 300 kΩ |
| 2.5 V | 390 kΩ | 360 kΩ |
| 2.7 V | 487 kΩ | 390 kΩ |
| 2.8 V | 360 kΩ | 270 kΩ |
| 3.0 V | 430 kΩ | 287 kΩ |
| 3.1 V | 620 kΩ | 390 kΩ |
| 3.3 V | 682 kΩ | 390 kΩ |
| 5.0V | 910 kΩ | 287 kΩ |

Operating Region and Power Dissipation


Since the iD9306 is a linear regulator, its power dissipation is always given by $P = I_{OUT} (V_{IN} - V_{OUT})$. The maximum power dissipation is given by: $P_{D(MAX)} = (T_J - T_A) / \theta_{JA} = (125^\circ\text{C} - 25^\circ\text{C}) / 250^\circ\text{C/W} = 400\text{mW}$ Where $(T_J - T_A)$ is the temperature difference the iD9306 die and the ambient air, θ_{JA} is the thermal resistance of the chosen package to the ambient air. For surface mount device, heat sinking is accomplished by using the heat spreading capabilities of the PC board and its copper traces. In the case of a SOT-23-5 package, the thermal resistance is typically 240°C/Watt . Refer to Figure 6 & 7 for the iD9306 valid operating region (Safe Operating Area) and refer to Figure 8 for maximum power dissipation information of SOT-23-5.

The die attachment area of the iD9306 lead frame is connected to pin 2, which is the GND pin. Therefore, the GND pin of iD9306 can dissipate the heat from the die very effectively. To improve the maximum power providing capability, connect the GND pin to ground using a large ground plane near the GND pin.

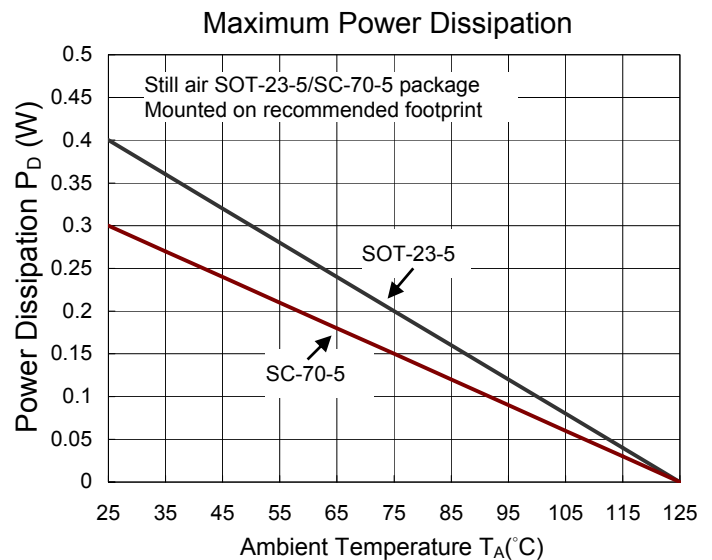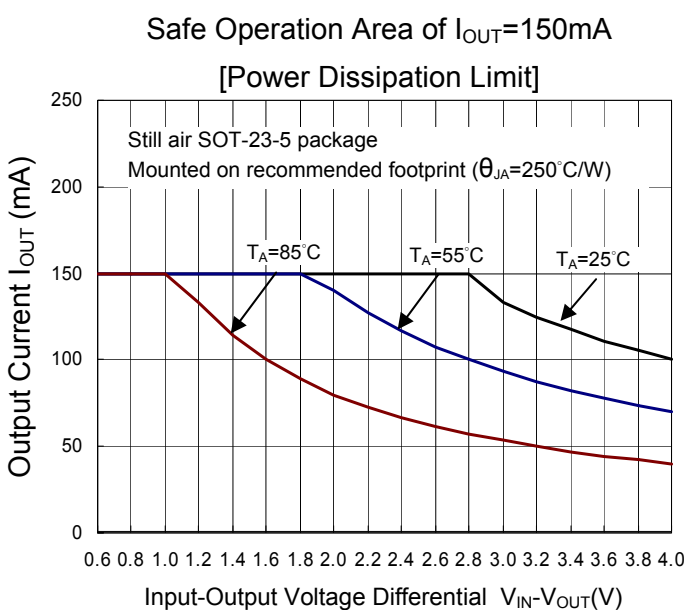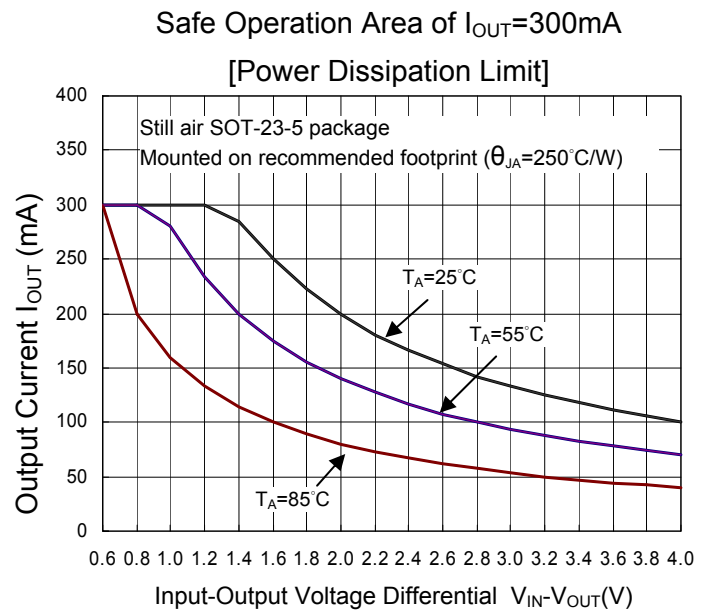


Packaging

SOT-23-5

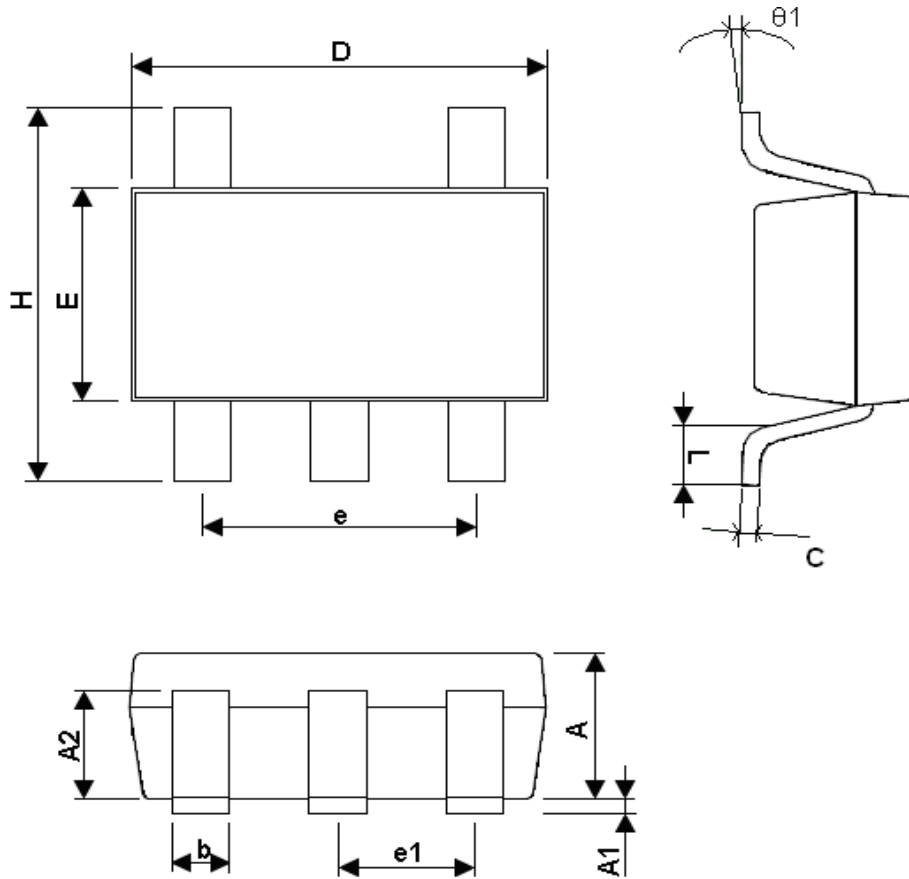


| SYMBOLS | DIMENSIONS IN MILLIMETERS | | | DIMENSIONS IN INCH | | |
|---------|---------------------------|-----------|------|--------------------|-------|-------|
| | MIN | NOM | MAX | MIN | NOM | MAX |
| A | 1.00 | 1.10 | 1.30 | 0.039 | 0.043 | 0.051 |
| A1 | 0.00 | --- | 0.10 | 0.000 | --- | 0.004 |
| A2 | 0.70 | 0.80 | 0.90 | 0.027 | 0.031 | 0.035 |
| b | 0.35 | 0.40 | 0.50 | 0.013 | 0.016 | 0.020 |
| C | 0.10 | 0.15 | 0.25 | 0.004 | 0.006 | 0.001 |
| D | 2.70 | 2.90 | 3.10 | 0.106 | 0.114 | 0.122 |
| E | 1.50 | 1.60 | 1.80 | 0.059 | 0.063 | 0.071 |
| e | --- | 1.90(TYP) | --- | --- | 0.075 | --- |
| H | 2.60 | 2.80 | 3.00 | 0.102 | 0.110 | 0.118 |
| L | 0.370 | --- | --- | 0.015 | --- | --- |
| Θ1 | 1° | 5° | 9° | 1° | 5° | 9° |
| e1 | --- | 0.95(TYP) | --- | --- | 0.037 | --- |

TSOT-23-5

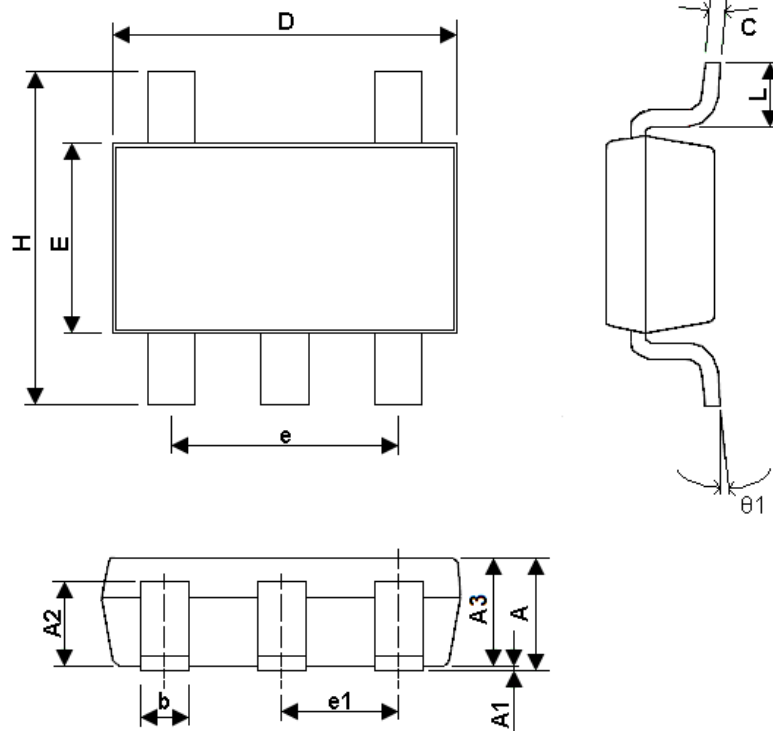

| SYMBOLS | DIMENSIONS IN MILLIMETERS | | | DIMENSIONS IN INCH | | |
|------------|---------------------------|-----------|------|--------------------|------------|-------|
| | MIN | NOM | MAX | MIN | NOM | MAX |
| A | --- | --- | 1.00 | --- | --- | 0.039 |
| A1 | 0.00 | --- | 0.10 | 0.000 | --- | 0.004 |
| A2 | 0.58 | 0.68 | 0.78 | 0.023 | 0.027 | 0.030 |
| A3 | 0.84 | 0.87 | 0.90 | 0.033 | 0.034 | 0.035 |
| b | 0.35 | 0.40 | 0.50 | 0.014 | 0.016 | 0.020 |
| C | 0.10 | 0.125 | 0.15 | 0.004 | 0.005 | 0.006 |
| D | 2.70 | 2.90 | 3.10 | 0.106 | 0.114 | 0.122 |
| E | 1.50 | 1.60 | 1.80 | 0.059 | 0.063 | 0.071 |
| e | --- | 1.90(TYP) | --- | --- | 0.075(TYP) | --- |
| H | 2.60 | 2.80 | 3.00 | 0.102 | 0.110 | 0.118 |
| L | 0.370 | --- | --- | 0.015 | --- | --- |
| $\theta 1$ | 1° | 5° | 9° | 1° | 5° | 9° |
| e1 | --- | 0.95(TYP) | --- | --- | 0.037 | --- |


SC-70-5

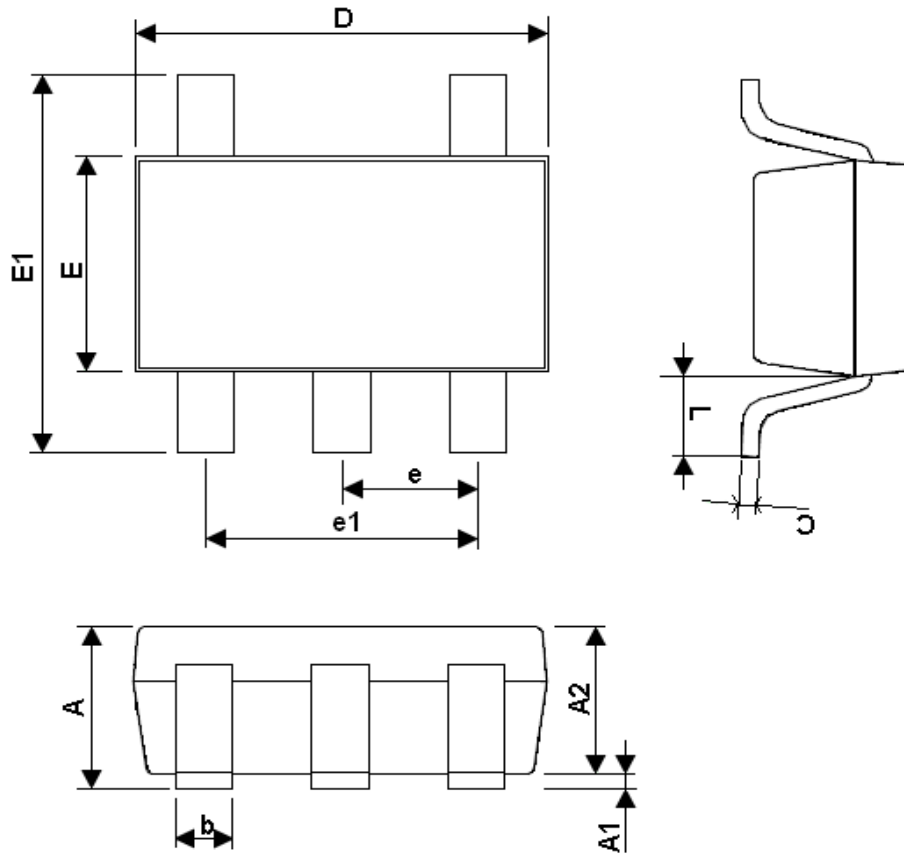

| SYMBOLS | DIMENSIONS IN MILLIMETERS | | | DIMENSIONS IN INCH | | |
|---------|---------------------------|-----|------|--------------------|-----|-------|
| | MIN | NOM | MAX | MIN | NOM | MAX |
| A | 0.90 | --- | 1.10 | 0.036 | --- | 0.044 |
| A1 | 0.025 | --- | 0.10 | 0.001 | --- | 0.004 |
| A2 | 0.875 | --- | 1.00 | 0.035 | --- | 0.040 |
| b | 0.20 | --- | 0.40 | 0.008 | --- | 0.016 |
| C | 0.10 | --- | 0.15 | 0.004 | --- | 0.006 |
| D | 1.90 | --- | 2.10 | 0.076 | --- | 0.084 |
| E | 1.15 | --- | 1.35 | 0.046 | --- | 0.054 |
| E1 | 2.00 | --- | 2.20 | 0.080 | --- | 0.088 |
| e | 0.65 BSC. | | | 0.026 BSC. | | |
| e1 | 1.30 BSC. | | | 0.052 BSC. | | |
| L | 0.425 REF. | | | 0.017 REF. | | |


Footprints

SOT-23-5/TSOT-23-5

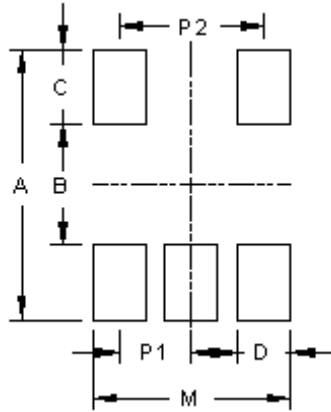

| Package | Number of Pin | Footprint Dimension (mm) | | | | | | | Tolerance |
|----------|---------------|--------------------------|------|------|------|------|------|------|-----------|
| | | P1 | P2 | A | B | C | D | M | |
| SOT-23-5 | 5 | 0.95 | 1.90 | 3.60 | 1.60 | 1.00 | 0.70 | 2.60 | ±0.10 |

SC-70-5

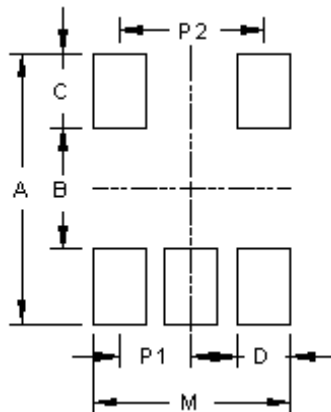

| Package | Number of Pin | Footprint Dimension (mm) | | | | | | | Tolerance |
|---------|---------------|--------------------------|------|------|------|------|------|------|-----------|
| | | P1 | P2 | A | B | C | D | M | |
| SC-70-5 | 5 | 0.65 | 1.30 | 2.70 | 1.10 | 0.80 | 0.40 | 1.70 | ±0.10 |