


**Typical Application Circuit
(Adjustable Operation)**

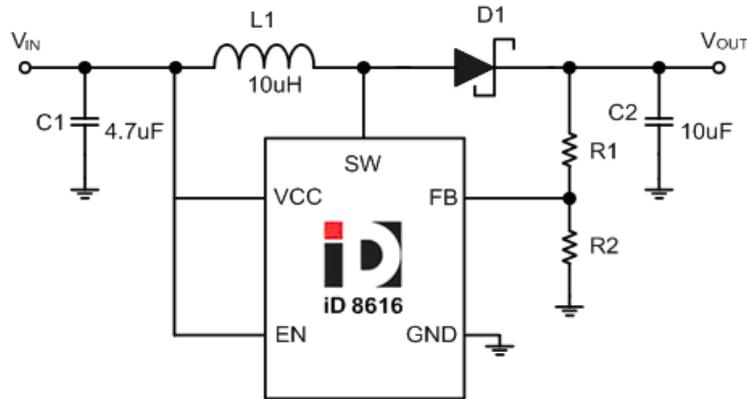

Absolute Maximum Ratings (Note 1)

VCC Voltage	-0.3V to 6.5V
SW Voltage	-0.3V to 25V
EN, FB Voltage	-0.3V to $V_{IN}+0.3V$
Power Dissipation, P_D @ $T_A=25^\circ C$	
SOT-23-6	400mW
Thermal Resistance, θ_{ja}	
SOT-23-6	250°C/W
Lead Temperature	260°C
Storage Temperature	-65°C to 150°C

Recommended Operating Conditions

Input Voltage V_{IN}	2.7V to 6V
EN Input Voltage	0V to V_{IN}
Junction Temperature	-40°C to 125°C
Ambient Operating Temperature	-40°C to 85°C